



The new degree of comfort.®



Residential Electric
Professional *Classic*
MiniTank Water Heaters

Rheem® Professional *Classic*® MiniTank™ Electric Water Heaters

Deliver Hot Water Wherever You Need It

Rheem Professional *Classic* MiniTank 1, 2.5, 4, and 6 are portable electric water heaters. MiniTanks provide hot water wherever a water and electrical outlet are available. Ideal for recreational vehicles, barns, food trucks and outdoor kitchens. Installed at the point-of-use they can deliver up to 6 gallons of hot water.

PERFORMANCE FEATURES

- Saves Space – Compact design is up to 93% smaller than a standard electric water heater
- Installs in an upright position on the floor or wall (bracket included)
- Flexible operation with hot and cold water feeds from unit
- Status indicator lights illuminate for power and when the unit is actively heating
- Power cord connects to a grounded 120V shared outlet. No electrical work required.
- Replaceable heating element, anode rod and enameled glass-lined tank with a single weld design extends units life
- Temperature adjusting dial controls the water temperature range from 50°F - 140°F (10°C - 60°C)
- Includes temperature and pressure (T&P) relief valve (210°F and 150 PSI)

WARRANTY

- 5 Years - Leaks, 2 Years - Parts

See Use and Care Manual for complete information.

MiniTank



PROE1 1 RH MT



PROE2 1 RH MT



PROE4 1 RH MT



PROE6 1 RH MT



Tested and certified by the
Water Quality Association
against NSF/ANSI 372 for
lead free compliance.

MiniTank Specifications

DESCRIPTION	FEATURES							DIMENSIONS (SHOWN IN INCHES)						
MODEL NUMBER	GALLONS	POWER (WATTS)	VOLTAGE	TOTAL UNIT AMPERAGE (AMPS)	PHASE	WATER CONNECTION	MAX WATER PRESSURE (PSI)	HEIGHT	WIDTH	DEPTH	WEIGHT	MAX RECOVERY TIME	CONNECTION TYPE	T&P RELIEF VALVE
PROE1 1 RH MT	1.5	1440	120	12 A	1	½" NPT (top)	150	15.39	9.71	9.63	13.9 lbs.	8 minutes	Plug-in	Included
PROE2 1 RH MT	2.5	1440	120	12 A	1	½" NPT (top)	150	17	10.91	10.94	17.6 lbs.	15 minutes	Plug-in	Included
PROE4 1 RH MT	4.0	1440	120	12 A	1	½" NPT (top)	150	18.24	12.28	12.65	21 lbs.	24 minutes	Plug-in	Included
PROE6 1 RH MT	6.0	1440	120	12 A	1	¾" NPT (top)	150	20.83	13.86	14.19	27.1 lbs.	37 minutes	Plug-in	Included



INTEGRATED HOME COMFORT

Rheem.com

08/24 FORM NO. PROE RHMT Rev. 1




The new degree of comfort®




Residential Electric
Professional Classic
MiniTank Water Heaters


PROE1 1 RH MT




PROE2 1 RH MT



PROE4 1 RH MT




PROE6 1 RH MT

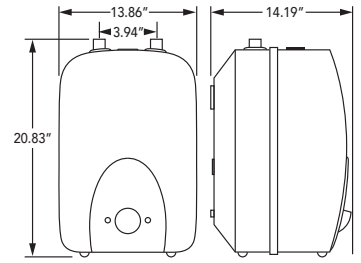


SAMPLE INSTALLATIONS


STANDALONE POINT-OF-USE HEATING APPLICATION

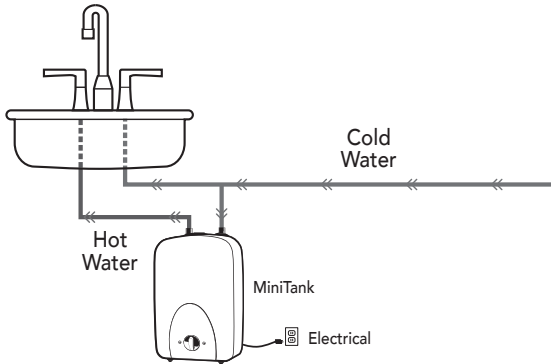


STANDALONE POINT-OF-USE MULTI FIXTURE APPLICATION

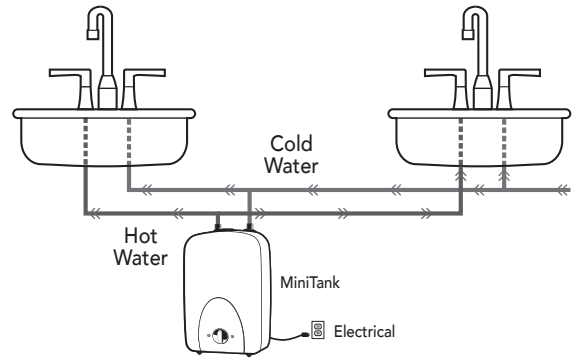

POINT-OF-USE BOOSTER HEATING APPLICATION FROM CENTRAL TANK HEATING SYSTEM

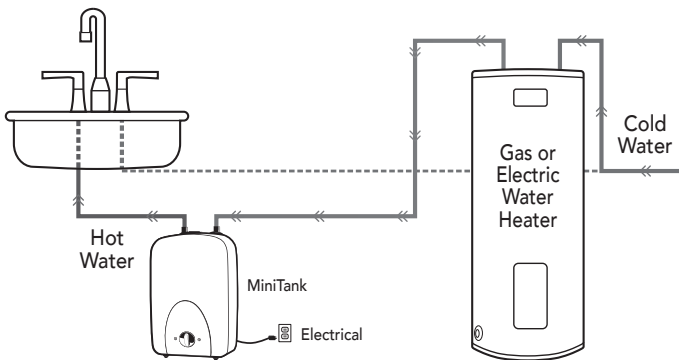

SOLUTION FOR "COLD WATER SANDWICH" GAS TANKLESS HEATING APPLICATION

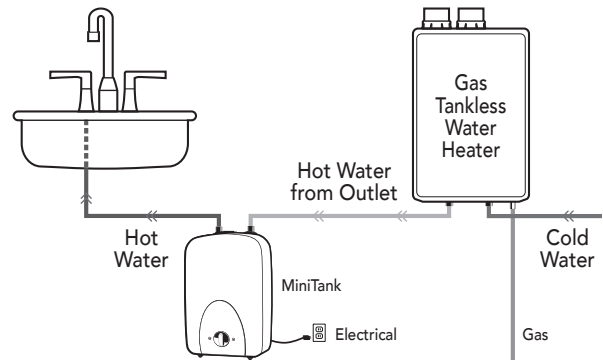

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem.com | 800.374.8806
Manufacturers National Service Department
400 Captain Neville Drive, Waterbury, CT 06705



INTEGRATED HOME COMFORT